



TIM CAMPBELL 800-400-7500



Item # _____

Job _____

Metro C5 6 Series Heated Holding Cabinet

- **Control:** The 6 Series provides control of temperature for safe and hot food. Temperature is displayed on an “always-on” analog thermometer for continuous monitoring of the cabinet temperature, even when turned off or unplugged.
- **Performance:** Rapid heat-up and recovery times are achieved with a thermostatically controlled ducted heating system.
- **Passive Humidity:** An integral water pan system can be used to add humidity to the cabinet environment, improving food quality.
- **Configurations:**
 - Sizes: Full Height, 3/4 Height, 1/2 Height, and Under Counter.
 - Doors: Full Length Solid, Full Length Clear, Dutch Solid, Dutch Clear. All are lift off and field reversible.
 - Reach-In or Pass-Thru (not available on under counter).
 - Materials: Stainless Steel and Aluminum.
- **Capacity:** Universal slides hold 18"x26" sheet pans or 12"x20" steam table pans on adjustable 1 1/2" increments. Lip load slides hold 18"x26" sheet pans on 1 1/2" increments. Optional Wire Shelf interfaces with universal slide system to accommodate small items and pans.
- **Reliability:** Reliability and durability are designed into C5 from the ground up. High-quality components and robust construction provide a long life of service and worry-free use.
- **Top-Mounted Controls:** Ergonomic user-friendly controls are mounted at the top of the cabinet for easier access, better readability, to prevent damage, and to simplify cleaning.
- **Energy Star:** Full Height, 3/4 Height, and 1/2 Height models are Energy Star.



Full Height
Dutch Solid
Doors




Under Counter Full Solid Door 1/2 Height Full Clear Door 3/4 Height Full Solid Door Full Height Dutch Clear Doors Full Height Full Solid Door

6 Series Controller:

- **Temperature:** The easy-to-use dial puts you in control of cabinet temperature.
- **Reliable Readout:** Measures and displays actual cabinet temperature even when the cabinet is off.
- **Analog Thermometer:** An “always-on” thermometer makes it ideal for transport applications.

Electro-Mechanical Control of Temperature

Reliable Analog Thermometer

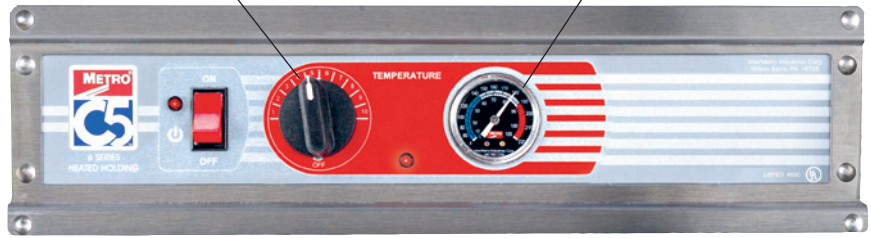

*Patents Pending



Metro C5 6 Series Heated Holding Cabinet

TIM CAMPBELL 800-400-7500

Specifications


- Cabinet Material:** Type 304 stainless steel; 20-gauge polished exterior; 22-gauge interior, or .063" aluminum, brushed exterior, natural interior.
- Insulation:** Full perimeter, 1" thick, high-density fiberglass. R Value=4.2
- Casters:** Four casters with 5" donut neoprene wheel, double ball bearing swivel, ball bearing axle, nickel plated, two with brake. 3" rubber casters on Under Counter models.
- Doors:**
 - Solid doors are fully insulated, double-panel construction.
 - Clear doors are double-pane, tempered glass. Argon filled with Low-E coating.
- Hinges:** Self-closing, lift-off, double hinged, with long-life nylon bearings.
- Gaskets:** High temperature, cabinet mounted, Santoprene gaskets.
- Latches:** Chrome plated, high-strength magnetic pull latch with lever-action release.
- Handles:** Four built-in polymer handles.
- Universal Slides:** Universal wire slides; 1/4" diameter nickel-chrome wire adjustable on 1 1/2" increments. 16-gauge, Type 304, stainless steel vertical standards.
- Lip Load Slides:** 1 1/2"x1 1/2"x.063" extruded aluminum channel slides on .063" Aluminum vertical standards.
- Slide Capacities:**

Cabinet Size	Universal Slides				Lip Load Slide Pan Capacity 18"x26"
	Slide Pairs Provided	Max.*	Pan Capacity** 18"x26"	12"x20"x2 1/2"	
Full Height	18	37	18	36	36
Full Height/Dutch	18	35	17	34	35
3/4 Height	14	29	14	28	29
1/2 Height	8	17	8	16	17
Under Counter	5	10	5	10	10

*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.

**Capacity based on standard number of slide pairs provided on 3" spacing.

- Display and Controls:** Analog cabinet thermometer with independent thermostat control knob.
- Heat Generation System:** Thermostatically controlled 1950 Watt heating element, ball bearing blower motor, and ducted air system.
- Cord:** 7 1/2' cord with NEMA 5-20P plug. Cord mounted on top (Full, 3/4, Pass Thru) or back (1/2, Under Counter) can be field reversed.
- Thermal Performance:** 70° F to 200° F operating temperature range.
- Minimum Clearances from Enclosures:** 1 1/2" clearance from cabinet walls on sides and back. 6" clearance is required on top.
- Dimensions:**

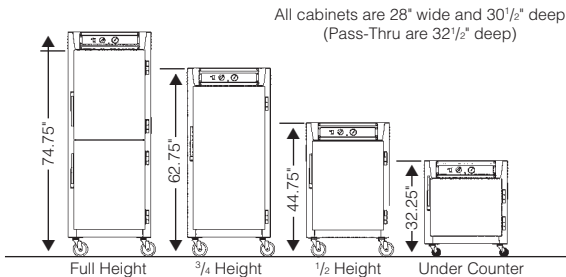

Reach-In Model Number Description

Cabinet Height
9 = Full Height
7 = 3/4 Height
5 = 1/2 Height
3 = Under Counter

Door Style
FS = Full Length Solid
FC = Full Length Clear
DS = Dutch Solid *
DC = Dutch Clear *

Slide Type
U = Universal Wire
L = Lip Load Aluminum

C569-SDS-U

Cabinet Material
S = Stainless
N = Aluminum



For Standard
Wattage Cabinets
(120V, 16A, 60Hz, 2000W)

*Please note: Dutch doors only available on full-size models.

Pass Thru* Door Style

Pass-Thru Model Number Description

C569-SDS-UPDS

*Please note: Pass-Thru is only available on Full Height, 3/4 Height, and 1/2 Height Models.

Low Watt Model Number Description

C569L-SDS-U



Add "L" for Lower
Wattage Cabinets
(120V, 12A, 60Hz, 1440W)

Export Model Number Description

C569X-SDS-U



Add "X" for
Export Cabinets
(220-240V, 7.6-8.3A,
50/60Hz, 1681-2000W)

Models with Accessories or Options

C569-SDS-UA

C569-SDS-UPDSA

An "A" suffix indicates
that accessories need
to be factory assembled
to the cabinet. Order
accessories separately.

Available Accessories:

- Flush Latch Handle (C5-LATCHFLUSH) *
- Twist Locking Handle (C5-LATCHTWST) *
- Key Locking Latch Handle (C5-LATCHLOCK) *
- Stainless Steel Handles (C5-HANDLE)
- Bumper & Drip Trough (C5-BUMPDRIP)
- Full Perimeter Bumper (C5-PERMBUMP)
- Twist Lock Plug (C5-RTWSTPLG)
- Right Angle (P-Style) Plug (C5-RTANGPLG)
- Control Panel Cover (C5-COVER)
- 5" Rear Rigid Casters (C5-5RDGCSTR)
- 6" Casters (C5-6CASTER)
- 6" Stainless Steel Legs (C5-SSLEGS)
- Chrome Universal Slide Pair (C5-USLIDECPR)
- Stainless Steel Universal Slide Pair (C5-USLIDESPR)
- Stainless Steel Universal Slide Upgrades
 - Full Height (C5-SSUSLIDE-9)
 - 3/4 Height (C5-SSUSLIDE-7)
 - 1/2 Height (C5-SSUSLIDE-5)
 - Under Counter (C5-SSUSLIDE-3)
- Small Item Shelf (C5-SHELF)
- Factory Left-Hand Hinging (DD3768)
- Factory Same-Side Pass-Thru Door Hinging (C5-SAMESIDE)

*Please note: (1) handle must be ordered for each door (i.e. — dutch doors require (2) handles; pass-thru dutch doors require (4) handles)