



TIM CAMPBELL 800-400-7500

Item # \_\_\_\_\_

Job \_\_\_\_\_

## HD SUPER™ DUNNAGE RACKS

- **Holds More than a Ton:** Stores goods safely up off the floor. The 48" (1220mm) length rack has a 3,000 lb. (1360kg) uniformly distributed static load capacity; the 60" (1525mm) length rack holds up to 2,400 lbs. (1087kg).
- **Withstands Impact:** The extra capacity of the HD Super™ dunnage rack translates into an increased ability to stand up under the strain of unbalanced loads and the repeated impact of materials being placed on it.
- **HD Super™ Design:** Provides fast, secure assembly without the use of any special tools. 1<sup>5</sup>/<sub>8</sub>" (41mm) posts provide greater rigidity.
- **Efficient Storage:** The low profile of Metro dunnage racks makes it easy to store large, bulky items without taking up valuable shelf space.
- **Removable Wire Deck:** Fits top support frame. Lifts off for thorough cleaning. Offset wire design raises deck above post caps, helps prevent items from snagging or tearing.
- **Convenient:** Lower support frame is open in front – no need to move the rack to clean beneath it. Open wire grid minimizes dust and moisture accumulation on deck.
- **Available Options:** Chrome-plated, Metroseal II™ or stainless steel.
- **Leveling Feet:** Compensate for surface irregularities.






# HD SUPER™ DUNNAGE RACKS

## Specifications

- **Construction:** Top and lower support frames are made of 1½" (38mm) square tubing. Removable deck consists of 5/16" (8mm) diameter wire.

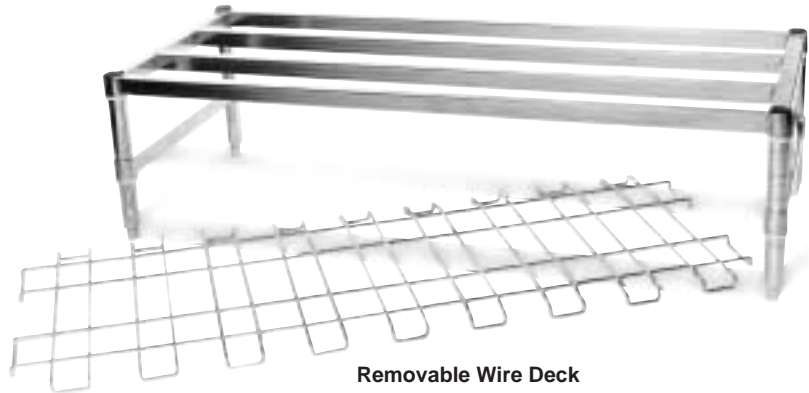

Removable Wire Deck

## Dimensions

Cat. No. Chrome	Cat. No. Metroseal II™	Cat. No. Stainless	Width		Length		Height		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
HDP35C	HDP35K2	HDP35S	18	455	48	1220	16¼	413	52	24
HDP36C	HDP36K2	HDP36S	18	455	60	1525	16¼	413	62	28
HDP55C	HDP55K2	HDP55S	24	610	48	1220	16¼	413	57	26
HDP56C	HDP56K2	HDP56S	24	610	60	1525	16¼	413	66	30

Maximum capacity 2,400 lbs. (1087kg) uniformly distributed static load on the 60" (1524mm) length racks; 3,000 lbs. (1360kg) on the 48" (1220mm) length racks.

**Note:** Capacity will be reduced and the unit will become less stable if the 3-sided frame is mounted higher than 6" (152mm) from the floor.