



## MetroMax i™ DRYING RACK UNITS

The MetroMax i Drying Rack combines the corrosion resistance and strength of MetroMax i with the convenience of a drying rack unit that efficiently holds pots, pans and trays while they dry.

- **Perfect for Damp, Humid Conditions:** All polymer construction with Type 304 Stainless Steel wire drop-in shelves. Posts and shelves offer a lifetime warranty against rust and corrosion. Corrosion-resistant, epoxy-coated drying rack.
- **Versatile:** Shelves are interchangeable to suit all needs. Two intermediate stainless steel shelves provide maximum space utilization for pots, pans and lids. One shelf features an epoxy coated tray drying rack with 34 holding slots. The open grid bottom shelf is great for drying large stock and lobster pots.
- **Cleans Easily:** The top and bottom shelves feature the MetroMax i open-grid shelf mats that lift off easily and fit in the dish machine. Type 304 Stainless Steel wire drop-ins clean easily.
- **Adjustable:** Shelves are adjustable at 1" (25mm) increments along the height of the numbered posts.
- **\*Microban Antimicrobial Product Protection:** Built into the high contact areas of the product — shelf mats, posts, and shelf frame pultrusions — to inhibit the growth of bacteria, mold, mildew, and fungus that causes odors, stains, and product degradation. It keeps the product “cleaner between cleanings”.
- **Mobile:** Corrosion-resistant polymer casters option allows for easy cleaning and mobility.

### Key Benefits

- Fast drying of trays, pans, lids, pots and all pot sink items.
- Promotes food safety by eliminating moisture.
- Interchangeable shelves adapt to all environments.
- Offers an efficient organized drying area.
- Allows superior air circulation.
- Mobile unit allows for easy floor clean-up and transportability.



*Stationary*



*Mobile*



# MetroMax i™ DRYING RACK UNITS

## Specifications

- **Longitudinal Beams & Posts:** Pultrusions — continuous glass fibers and thermo set resin composite with built-in Microban antimicrobial product protection. Exterior surfaces are high-impact thermoplastic resin.
- **End Beams, Adjustable Foot & Socket:** Injection molded polyester thermoplastic resin with glass reinforcement.
- **Drop In — Electro-Polished Type 304 Stainless Steel**
- **Cutting Board/Tray Drying Rack:** Corrosion resistant taupe epoxy coated steel with built-in Microban product protection.
- **Shelf Mats:** Mineral reinforced polypropylene. Mats contain Microban antimicrobial product protection.
- **Stationary Load Capacity:**  
300 lbs. (136kg) per wire grid  
800 lbs. (363kg) per shelf
- **Mobile Load Capacity:**  
800 lbs. (363kg) per shelf  
300 lbs. (136kg) per wire grid  
800 lbs. (363kg) per unit
- **Polymer Casters:** 2 swivel, 2 brake. Corrosion-resistant, polymer horn, stainless steel axle and hardware. 5" (127mm) diameter.

## Dimensions

### MetroMax i™ Stationary Drying Rack Unit

Includes two drop-ins and one cutting board/tray drying rack.

Model No.	Width		Length		Height		Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
PR48X3	24	610	48	1219	75½	1917.5	106	49

### MetroMax i™ Mobile Drying Rack Unit

Includes two drop-ins and one cutting board/tray drying rack.

Model No.	Width		Length		Height		Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
PR48VX3	26	660	50	1270	68	1702	115	52

Dimensions include caster bumpers.

## Cutting Board/Tray Drying Rack and Stainless Drop-In Components


- Use to create a unique configuration to fit the application.

### Cutting Board & Tray Drying Rack System

- Mount to open grid and solid MetroMax i shelves or open grid MetroMax Q shelves
- 1 1/8" (28mm) or 3" (76mm) slot spacing available.

I and Q Model No.	Width (mm)		Length (mm)		Height (mm)		Wire Spacing (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
DR36S	24	610	33 7/8	860	5 1/4	133	3/4	19	9	4.1
DR48S	24	610	45 7/8	1165	5 1/4	133	3/4	19	12	5.4
DR60S	24	610	57 7/8	1470	5 1/4	133	3/4	19	15	6.8

Note: Can be retrofitted to original MetroMax and MetroMax Q.

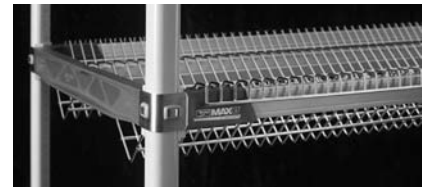

## Type 304 Stainless Drop-In Racks

- Drop-ins require a four-sided MetroMax i frame and center beam. See spec sheet 9.25 for open frame and center beam part numbers
- A drop-in rack can be added to a standard MetroMax i shelf by removing the shelf mats and using the shelf frame and center beam.

I and Q Model No.	Fits Shelf (mm)		Upright Spacing (mm)		Upright Height (mm)		Tray Capacity	Approx. Pkd. Wt. (lbs.) (kg)	
MTR2436XE	24x36	457x914	1 1/8	28	6	150	24	13.5	6.1
MTR2448XE	24x48	457x1219	1 1/8	28	6	150	34	18.0	8.2
MTR2460XE	24x60	457x1524	1 1/8	28	6	150	42	22.5	10.2
MTR2436XEA	24x36	457x914	3	76	6	150	10	9.8	4.4
MTR2448XEA	24x48	457x1219	3	76	6	150	14	13	5.9
MTR2460XEA	24x60	457x1524	3	76	6	150	17	16.3	7.4

Note: Can be retrofitted to original MetroMax and MetroMax Q.

