




Item# _____

Job _____

ROD TOP TABLES

Type 304 stainless steel, H.D. Super™ posts and proven Super Erecta construction throughout.

- Tops constructed of 1/4" (6mm), electro-polished, Type 304 stainless steel rods with 1" openings. Provides 75% open top.
- Unique height adjustable legs allow adjustment from 33" (838mm) to 40" (1016mm), in 1" (25mm) increments.
- 400 lb. (181.4kg) weight load capacity.
- Units ship knocked down to save you money on freight.
- Tables are non-conductive but can be made conductive with the addition of aluminum split sleeves (9986HZ) and a drag cable (ASKCR).
- Tables with overhead (O.H.) have 74" (1880mm) heavy-duty (H.D.) rear posts.
- Cantilever shelves, accessory grid panels and accessories sold separately (see other side).

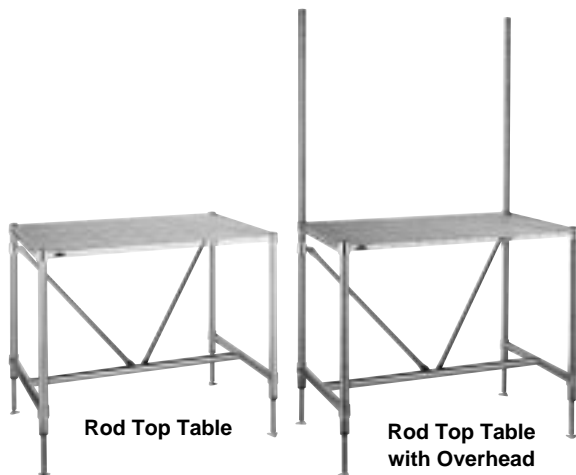

Rod Top Table

Rod Top Table with Overhead

ROD TOP TABLE

| Width/Length | | Cat. No. | Approx. Pkd. Wt. | |
|--------------|----------|----------|------------------|-------|
| (in.) | (mm) | | (lbs.) | (kg.) |
| 30x36 | 762x915 | CTR3036S | 32 | 14.5 |
| 30x48 | 762x1220 | CTR3048S | 40 | 18.1 |
| 30x60 | 762x1525 | CTR3060S | 48 1/2 | 22 |
| 30x72 | 762x1825 | CTR3072S | 58 | 26.3 |


ROD TOP TABLE WITH OVERHEAD

| Width/Length | | Cat. No. | Approx. Pkd. Wt. | |
|--------------|----------|------------|------------------|-------|
| (in.) | (mm) | | (lbs.) | (kg.) |
| 30x36 | 762x915 | CTR3036S-H | 40 | 18.1 |
| 30x48 | 762x1220 | CTR3048S-H | 48 | 21.8 |
| 30x60 | 762x1525 | CTR3060S-H | 55 1/2 | 25.2 |
| 30x72 | 762x1825 | CTR3072S-H | 65 1/2 | 29.7 |

PERF TOP TABLES

Type 304 stainless steel, H.D. Super™ posts and proven Super Erecta construction throughout.

- Tops are manufactured from 14 gauge, Type 304, electro-polished stainless steel, with .75" perforations on 1" (25mm) centers. Provides approximately 35% open area.
- Unique height adjustable legs allow adjustment from 33" (838mm) to 40" (1016mm), in 1" (25mm) increments.
- 400 lb. (181.4kg) weight load capacity.
- Units ship knocked down to save you money on freight.
- Tables are non-conductive but can be made conductive with the addition of aluminum split sleeves (9986HZ) and a drag cable (ASKCR).
- Tables with overhead (O.H.) have 74" (1880mm) heavy-duty (H.D.) rear posts.
- Cantilever shelves, accessory grid panels and accessories sold separately (see other side).

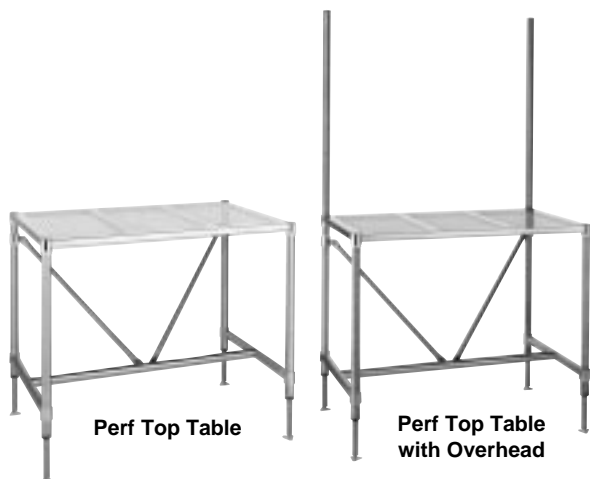

Perf Top Table

Perf Top Table with Overhead

PERF TOP TABLE

| Width/Length | | Cat. No. | Approx. Pkd. Wt. | |
|--------------|----------|----------|------------------|-------|
| (in.) | (mm) | | (lbs.) | (kg.) |
| 30x36 | 762x915 | CTP3036S | 35 | 15.9 |
| 30x48 | 762x1220 | CTP3048S | 46 | 20.9 |
| 30x60 | 762x1525 | CTP3060S | 58 | 26.3 |
| 30x72 | 762x1825 | CTP3072S | 69 | 31.3 |


PERF TOP TABLE WITH OVERHEAD

| Width/Length | | Cat. No. | Approx. Pkd. Wt. | |
|--------------|----------|------------|------------------|-------|
| (in.) | (mm) | | (lbs.) | (kg.) |
| 30x36 | 762x915 | CTP3036S-H | 42 1/2 | 19.3 |
| 30x48 | 762x1220 | CTP3048S-H | 53 1/2 | 24.3 |
| 30x60 | 762x1525 | CTP3060S-H | 65 1/2 | 29.7 |
| 30x72 | 762x1825 | CTP3072S-H | 76 1/2 | 34.7 |



CLEAN TABLES/WORKSTATIONS

WORKSTATION ACCESSORIES

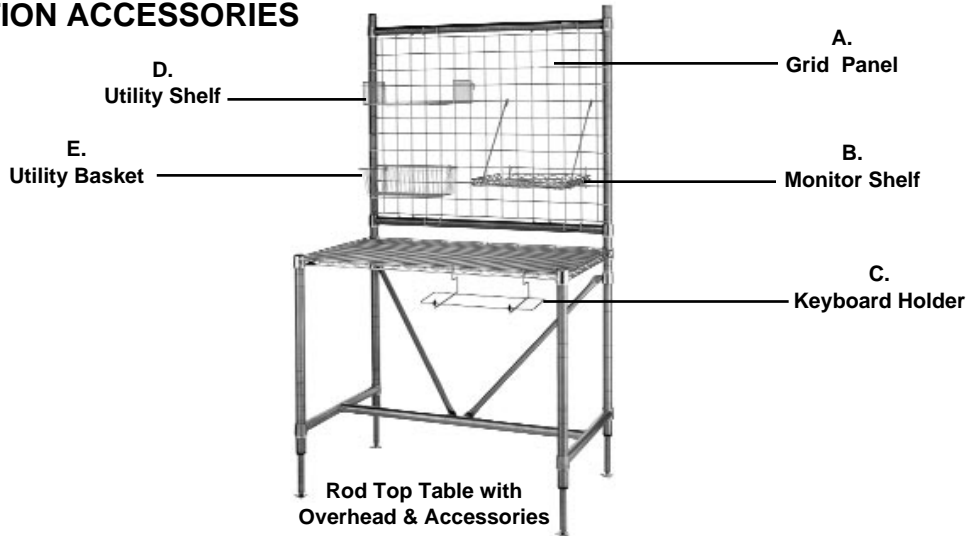

ACCESSORY GRID PANELS

| Description | Width/Length | | Fits Table Length | Cat. No. | Approx. Pkd. Wt. | |
|----------------|--------------|----------|----------------------|----------|--------------------------------|-------|
| | (in.) | (mm) | | | (lbs.) | (kg.) |
| Grid Panel (A) | 33"x36" | 838x915 | 36" | WGR3336S | 13 ⁴ / ₅ | 6.3 |
| Grid Panel (A) | 33"x48" | 838x1220 | 48" | WGR3348S | 18 ² / ₅ | 8.3 |
| Grid Panel (A) | 33"x60" | 838x1525 | 60" | WGR3360S | 23 | 10.4 |
| Grid Panel (A) | 33"x72" | 838x1829 | 72" | WGR3372S | 27 ¹ / ₂ | 12.5 |

NOTE 1: For use with Rod and Perf Top Tables with overheads.

NOTE 2: Grid panels can not be used in conjunction with cantilever shelves.

ACCESSORIES

| Description | Width/Length | | Cat. No. | Approx. Pkd. Wt. | |
|---------------------|--|-------------|----------|-------------------------------|-------|
| | (in.) | (mm) | | (lbs.) | (kg.) |
| Monitor Shelf (B) | 16 ³ / ₄ x16 ³ / ₄ | 425x425 | PBA-MSS | 6 | 2.7 |
| Keyboard Holder (C) | 9 ¹ / ₂ x16 | 241x406 | CKBHS | 1 | .45 |
| Utility Shelf (D) | 9x18 ¹ / ₂ | 228x470 | PBA-GSDS | 4 | 1.8 |
| Utility Basket (E) | 5x13 ³ / ₈ x7 | 127x345x180 | H209S | 8 ¹ / ₂ | 4 |

NOTE: Keyboard holder will not work on perf table.

OVERHEAD CANTILEVER SHELVES

| Length (in.) | (mm) | Fits Units (in.) | Cat. No. | Approx. Pkd. Wt. | |
|-----------------|------|---------------------|----------|--------------------------------|-------|
| | | | | (lbs.) | (kg.) |
| 36 | 915 | 36 | 1236CHS | 6 ¹ / ₂ | 2.9 |
| 48 | 1220 | 48 | 1248CHS | 10 ¹ / ₂ | 4.8 |
| 60 | 1525 | 60 | 1260CHS | 13 | 6 |
| 72 | 1825 | 72 | 1272CHS | 15 ¹ / ₂ | 7 |



NOTE 1: Cantilever shelves have a weight load capacity of 100 lbs. (45kg).

NOTE 2: Cantilever shelves cannot be used in conjunction with accessory grid panels.